


FlexRite™

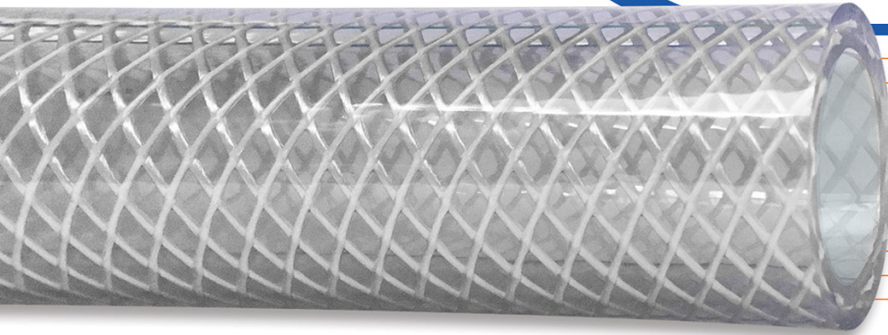

PBT "BRAID REINFORCED TUBING"

...provides dependable reinforcement!

PBT is flexible, clear tubing with polyester braids provides dependable reinforcement for all suitable applications and is compliant with 3A¹, USDA², USP³ Class VI, FDA⁴, NSF⁵ & RoHS⁶ standards.

Features:

- Light Weight
- Clear Viewing of Product Flow
- Highly Flexible
- Phthalate FREE
- Higher Working Pressures

Applications:

- Food & Beverage Processing
- Powered Food Products
- Packaging Machines
- Potable Water Transfer
- Pneumatic Lines
- Air Lines


P-Series hoses are Phthalate (DEHP) FREE

MODEL	I.D.	O.D.	WORKING PRESSURE	MIN. BEND RADIUS	WEIGHT PER FT.	VAC. IN HG.	LENGTH
PBT050*	1/2"	.81"	200 PSI	-	.13 lbs.	-	100'
PBT075	3/4"	1.12"	150 PSI	-	.22 lbs.	-	100'
PBT100	1"	1.37"	125 PSI	-	.30 lbs.	-	100'
PBT150	1 1/2"	1.94"	100 PSI	-	.64 lbs.	-	100'
PBT200	2"	2.49"	75 PSI	-	.94 lbs.	-	100'

TUBE FDA, 3-A*, USP Class VI, PVC, NSF
REINFORCEMENT Polyester textile inner braid

COVER Clear
TEMP. RANGE 25 to 150° F

PBT Braid Reinforced Tubing

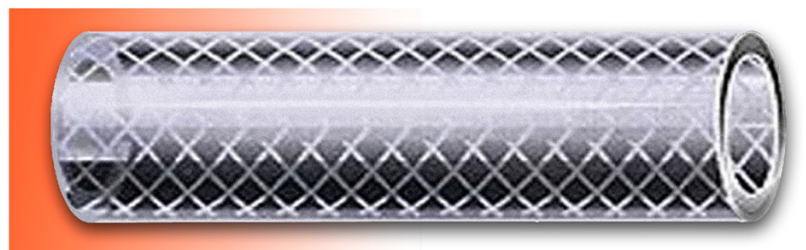

WARNING: Working pressure ratings for all Flex-Rite™ Products are based on 70° F (ambient temperature). Working pressure and vacuum ratings will decrease as temperatures increase. For "P" series applications that exceed 100°F contact manufacturer for suggestions.



513-889-2118 • 855-357-4110 • 513-889-2125 FAX

5452 Spellmire Dr, Cincinnati, OH 45246

www.acesanitary.com

ASPBT3618

¹3A- The PVC compound complies with the criteria in 3-A Sanitary Standards for Multiple-Use Plastic Materials, number 20.

²USDA - The PVC hose has been found chemically acceptable for use in slaughtering, processing, transporting, or storage areas in direct contact with meat or poultry food product prepared under Federal inspection.

³USP - The PVC compound has been tested and meets the requirements of the USP guidelines, for Class VI Plastics.

⁴FDA - The PVC ingredients used are sanctioned for food contact use under CFR title 21, parts 170-199 or FD&C Act, section 409(h), notifications relating to food contact substance.

⁵NSF - The hose is certified under NSF/ANSI standard 51: Food Equipment Materials. The inner surface PVC Material is also certified as Pipes and Related Products under NSF/ANSI standard 61: Drinking Water System

⁶RoHS - The product complies with the requirements of the EU directive 2002/95/EC which is on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

*The 3-A 62-02, standard applies only to assemblies of 3/4" diameter and larger.