


APST Unreinforced Tubing

Translucent, Platinum-Cured Silicone



Low-volatile grade, platinum-cured silicone tubing is clean-room produced for critical pharmaceutical, biopharm, cosmetic and food applications. AdvantaSil APST has undergone extensive physical, chemical and biological testing and meets USP Class VI, FDA CFR 177.2600, ISO 10993, European Pharmacopoeia 3.1.9 and 3-A standards.

AdvantaSil APST Unreinforced Tubing is not intended for implantation, continuous steam applications or elevated pressure levels.



KEY FEATURES



- Available with validated sterility assurance of 10^{-6} via gamma irradiation per ISO 11137 method VDmax 25
- Hardness value of 50 Shore A
- Extremely flexible
- General temperature range: -100°F (-73.3°C) to 400°F (204.4°C)
- Sterilizable by autoclave or gamma radiation
- Low volatile grade silicone suitable for pharmaceutical and biopharm applications
- Certified free of animal-derived ingredients
- Resists temperature extremes, compression set, chemical attack, ozone, radiation, moisture and environmental exposure
- Stocked in 25 ft., 50 ft. and 100 ft. coils with select sizes in longer lengths on spools
- Documented lot traceable with identification on bags
- Documented quality control
- Non-listed sizes, custom lengths, and special packaging available upon request
- AdvantaSil APST has a Master File with the U.S. Food and Drug Administration (#26598)
- Listed by the National Sanitation Foundation for food equipment materials (NSF-51)

SILICONE

www.advantapure.com



3265 Sunset Lane, Hatboro, PA 19040

www.sentinelprocess.com


P: 800.345.FLOW F: 888.329.9669



PURITY IN FLUID FLOW SYSTEMS®

Complete validation package available on request

AdvantaSil silicone tubing and hose products are quickly becoming recognized as superior choices for Single-Use processes worldwide. Engineers in process development and manufacturing have relied on AdvantaSil unreinforced tubing, reinforced hose, pump grade tubing and wire reinforced suction hose for years.



SPECIFICATIONS

Product Number	Notes	I.D. (in.) (mm.)	Wall (in.) (mm.)	O.D. (in.) (mm.) (reference)	Working Pressure at 70°F (21.1°C) (PSI) (Bar)	Standard Available Length (ft.)
APST-0030-0160		.030 .76	.065 1.65	.160 4.06	53 3.7	50
APST-0063-0125		.063 1.59	.031 .79	.125 3.18	22 1.5	50
APST-0063-0188		.063 1.59	.063 1.59	.188 4.76	33 2.3	50
APST-0078-0141	*	.078 1.98	.031 .79	.141 3.58	17 1.2	50
APST-0094-0219		.094 2.38	.063 1.59	.219 5.56	25 1.7	100
APST-0094-0281		.094 2.38	.094 2.38	.281 7.14	34 2.3	100
APST-0125-0250		.125 3.18	.063 1.59	.250 6.35	23 1.6	50, 100, 500 spool
APST-0125-0313		.125 3.18	.094 2.38	.313 7.94	29 2.0	50
APST-0125-0375	*	.125 3.18	.125 3.18	.375 9.53	37 2.6	50
APST-0156-0281	*	.156 3.97	.063 1.59	.281 7.14	not available	100
APST-0156-0406		.156 3.97	.125 3.18	.406 10.31	33 2.3	50
APST-0188-0313		.188 4.76	.063 1.59	.313 7.94	16 1.1	50
APST-0188-0375	†	.188 4.76	.094 2.38	.375 9.53	21 1.4	50
APST-0188-0438		.188 4.76	.125 3.18	.438 11.11	25 1.7	50
APST-0250-0313		.250 6.35	.031 .79	.313 7.94	not available	100
APST-0250-0375		.250 6.35	.063 1.59	.375 9.53	13 .9	50, 100
APST-0250-0438		.250 6.35	.094 2.38	.438 11.11	18 1.2	50, 100, 300 spool
APST-0250-0500		.250 6.35	.125 3.18	.500 12.70	22 1.5	50, 100
APST-0313-0375	*	.313 7.94	.031 .79	.375 9.53	not available	50, 100
APST-0313-0438		.313 7.94	.063 1.59	.438 11.11	11 .8	25, 50
APST-0313-0500		.313 7.94	.094 2.38	.500 12.70	17 1.2	50, 100
APST-0313-0563	*	.313 7.94	.125 3.18	.563 14.30	21 1.4	50, 100
APST-0375-0500		.375 9.53	.063 1.59	.500 12.70	10 .7	50, 100
APST-0375-0563		.375 9.53	.094 2.38	.563 14.30	16 1.1	50, 100

SILICONE



Product Number	Notes	I.D.		Wall		O.D.		Working Pressure at 70°F (21.1°C)		Standard Available Length (ft.)
		(in.)	(mm.)	(in.)	(mm.)	(in.)	(mm.)	(PSI)	(Bar)	
APST-0375-0625		.375	9.53	.125	3.18	.625	15.88	16	1.1	25, 50, 100, 150 spool
APST-0500-0625	*	.500	12.70	.063	1.59	.625	15.88	not available		50
APST-0500-0688		.500	12.70	.094	2.38	.688	17.48	11	.8	50
APST-0500-0750		.500	12.70	.125	3.18	.750	19.05	12	.8	50, 100
APST-0625-0875		.625	15.88	.125	3.18	.875	22.23	11	.8	50, 100
APST-0625-1000		.625	15.88	.188	4.76	1.000	25.40	16	1.1	25, 50
APST-0750-1000		.750	19.05	.125	3.18	1.000	25.40	10	.7	50, 100
APST-0750-1125	*	.750	19.05	.188	4.76	1.125	28.58	14	1.0	25, 50
APST-0875-1000		.875	22.23	.063	1.59	1.000	25.40	not available		50
APST-1000-1250		1.000	25.40	.125	3.18	1.250	31.75	8	.6	50
APST-1000-1375		1.000	25.40	.188	4.76	1.375	34.93	11	.8	25, 50
APST-1000-1500	*	1.000	25.40	.250	6.35	1.500	38.10	13	.9	50

Sold by standard coil length only. Add length suffix code to product number when ordering—see the **Coil Length Legend** at right for length suffix codes. Example: 25 ft. of .030 in. I.D. x .160 in. O.D. tubing is product number APST-0030-0160P.

Working pressures are calculated from burst testing using a 3:1 safety factor. Application testing is recommended.

Coils and spools are supplied double bagged in heat-sealed polybags and bulk packed. Contact your AdvantaPure Sales Representative for other packaging options.

Notes Legend:

*Limited stock availability; lead times and minimums may apply—call for details.


†Available in longer lengths on spools—call for details.

Coil Length Legend:

P = 25 feet

L = 50 feet

K = 100 feet

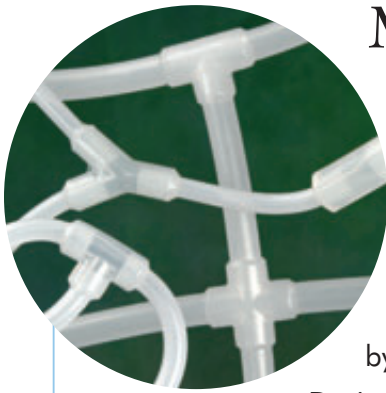

Molded Single-Use Manifold Assemblies

AdvantaPure specializes in the design and manufacture of molded Single-Use manifold assemblies for sampling and storage applications. These assemblies are available in AdvantaSil APST or AdvantaFlex® biopharmaceutical grade TPE.

Molded manifolds help eliminate the need for barbed fittings while providing a seamless transition from tubing to connection. Molded connections eliminate the risk of leaks, contamination and failures caused by barbed fitting connections.

Designs range from simple molded sanitary ends to complex configurations with varying lengths of tubing and several molded connections.

Learn more at www.advantapure.com/single-use-molded-manifolds.htm



AdvantaFlex addresses the need for a flexible, sterilizable, moldable, weldable and heat sealable biopharmaceutical tubing without silicone oils. AdvantaFlex maintains its physical properties following sterilization processes, remains translucent for visible product flow and does not become gummy. The tubing resists kinking and is an excellent component for Single-Use systems.

Learn more at www.advantapure.com/advantaflex.htm

Purity in Fluid Flow Systems®



Made in U.S.A.

Address: NewAge Industries AdvantaPure®
145 James Way
Southampton, PA 18966 U.S.A.

Toll Free Phone: **888-755-4370**
Phone: **215-526-2151**
Toll Free Fax: **888-258-4293**
Fax: **215-526-2167**
Web Site: **www.advantapure.com**
E-mail: **sales@advantapure.com**



DISTRIBUTED BY:



3265 Sunset Lane, Hatboro, PA 19040
www.sentinelprocess.com
P: 800.345.FLOW F: 888.329.9669

©2017 NewAge® Industries, Inc. Specifications are subject to change without notice. AdvantaPure products are produced by NewAge® Industries, Inc. AdvantaSil™, AdvantaFlex®, Purity in Fluid Flow Systems®, NewAge Industries AdvantaPure®, NewAge®, and the "N" logo are trademarks of NewAge® Industries, Inc.



WARRANTY: NewAge Industries AdvantaPure products are warranted to be free from defects in material and workmanship. Any product found to carry such defects will be replaced without charge. This warranty is limited only to the replacement of NewAge Industries AdvantaPure products, item for item, which after examination by NewAge Industries AdvantaPure are deemed defective. NewAge Industries AdvantaPure specifically disclaims any other liability. The data supplied is provided as a helpful guideline and is believed to be reliable; however, nothing stated shall constitute a guarantee, recommendation, or warranty for any application.
NOTICE: NewAge Industries, Inc. has been a privately owned corporation since 1954. Neither the corporation nor its principals are affiliated, in any way, with any other group or entity either representing themselves as or being referred to by the term NewAge.